




829+804 91,8x17,7 mm


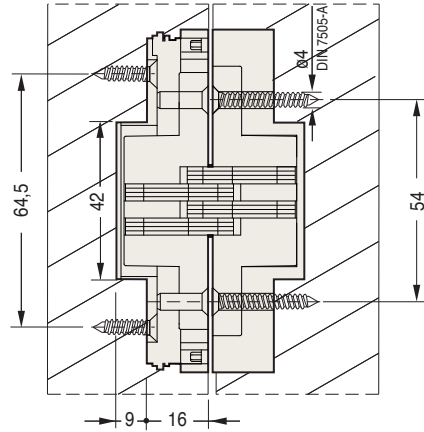


Cod.	Zinc alloy		
CI829804OTT00	brass	180°	20
CI829804NIK00	nickel	180°	20
CI829804NOP00	nickel	180°	20
CI829804ARG00	silver painted	180°	20


Patented

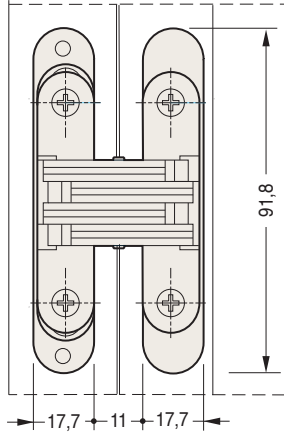


Mortise dimensions

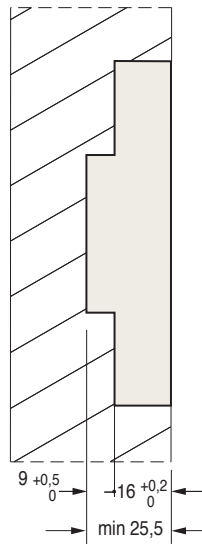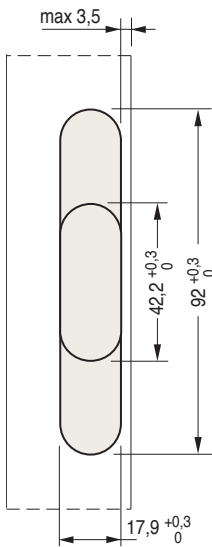

Cross section

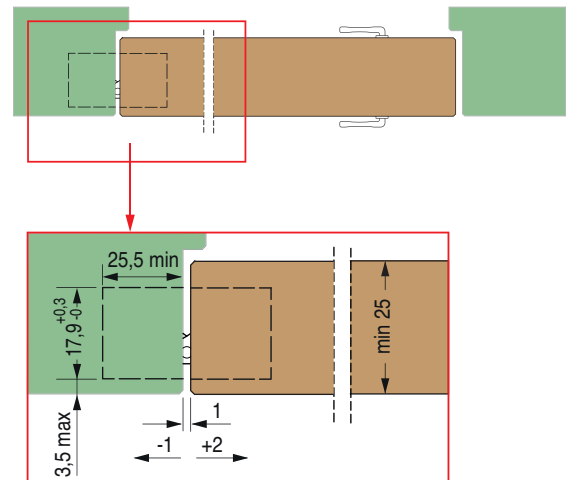




829+804 91,8x17,7 mm



Load capacity

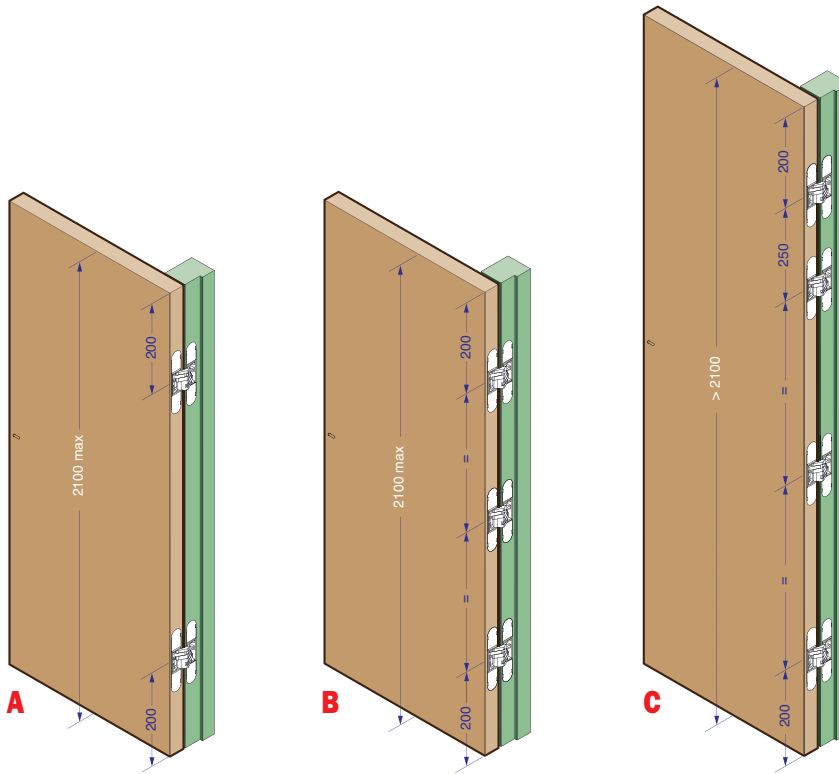

Wings
850 mm wide


- up to 2100 mm high
A - 2 hinges 15 kg
B - 3 hinges 25 kg
- over 2100 mm high
C - 4 hinges 25 kg

Before using a door closer, contact our technical office at ph. +39 031 771316


All hinges must be adjusted

Lubricate the hinges at least once a year


Installation

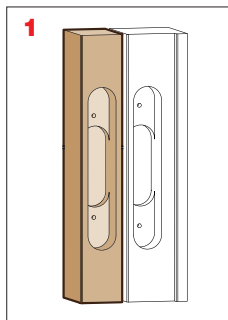


Hollows execution in the door and in the post

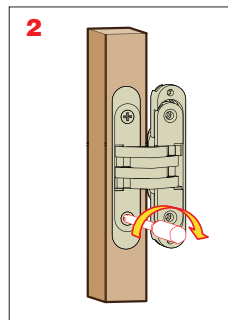

Mounting of fixed base and of hinge in the door; flat countersunk-head self-tapping screw




Mounting of fixed base and of hinge in the door; flat countersunk-head self-tapping screw

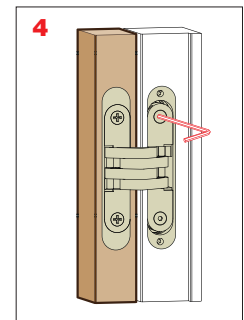


Mounting of hinge in the post; countersunk-head screw, allen screw included in the kit

Adjusting



2DZ
3 mm
1 mm
Depth
1 Loosen A
2 Adjust B
3 Tighten A



2DZ
2 mm
0
2 mm
Vertical
1 Loosen A
2 Adjust the door
3 Tighten A