

F-1 Box

The double wall drawer





F1-Box, the double wall drawer for all needs



F1-Box is Ferrari's new double wall drawer product range.

Several solutions, lengths, colors, and customizations are available according to the customer needs.

The drawers are easily and quickly mounted and dismantled and have a simple adjustment.

The product is supplied with full extension slides, with a 40 kg load capacity. The drawers are tested up to 80,000 cycles.



The F-1 Box drawer has built-in self-closing & soft closing systems.

Index

4	Standard F-1 drawer H=86mm
6	F-1 drawer with railing H=160mm
8	F-1 drawer with railing H=200mm
10	Mounting instructions drawers H=86mm
12	Mounting instructions drawers H=160mm
14	Mounting instructions drawers H=200mm
16	How to order
17	Inner drawers
19	Accessories
21	Sink drawers




F-1 Standard version 86 mm high

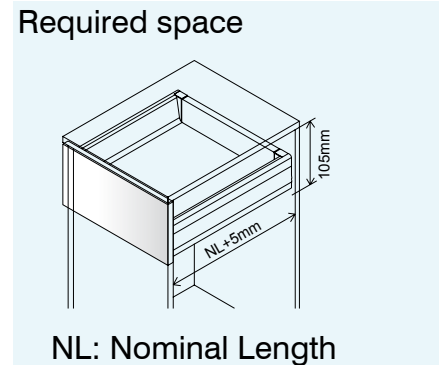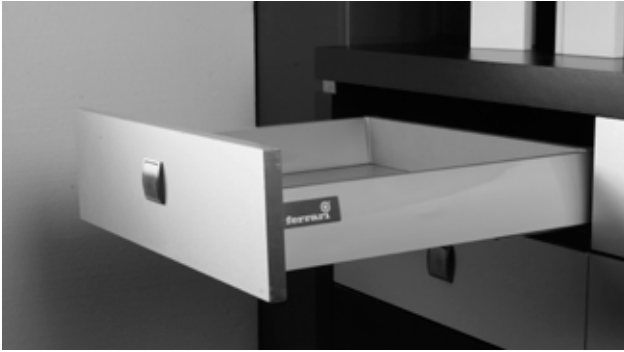


Product Characteristics


- Extremely silent, stable, and smooth mechanism
- Available lengths: mm 270, 300, 350, 400, 450, 500, 550
- 86 mm high side plate made of silver gray steel RAL 9006, upon request white RAL 9010, cream RAL 9001 or black RAL 9005 (see page 16)
- Vertical drawer adjustment ± 2 mm; horizontal drawer adjustment ± 1 mm
- Quick assembling and dismantling
- Concealed full extension runners with 40 kg load capacity
- Tested up to 80,000 cycles
- Built-in self-closing & soft closing mechanisms

Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. drawer height
F1270V1NT>PRV01	270 mm	250 mm	280 mm	105 mm
F1300V1NT>PRV01	300 mm	274 mm	305 mm	105 mm
F1350V1NT>PRV01	350 mm	324 mm	355 mm	105 mm
F1400V1NT>PRV01	400 mm	374 mm	405 mm	105 mm
F1450V1NT>PRV01	450 mm	424 mm	455 mm	105 mm
F1500V1NT>PRV01	500 mm	474 mm	505 mm	105 mm
F1550V1NT>PRV01	550 mm	524 mm	555 mm	105 mm

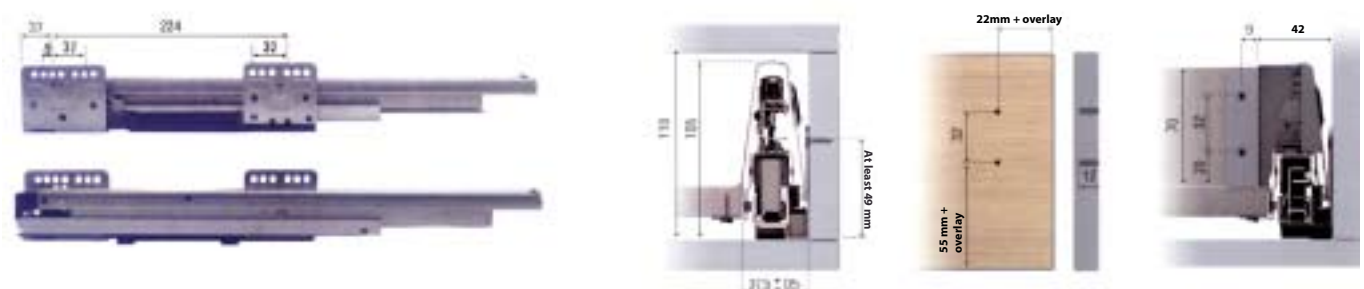




F-1 Standard version 86 mm high

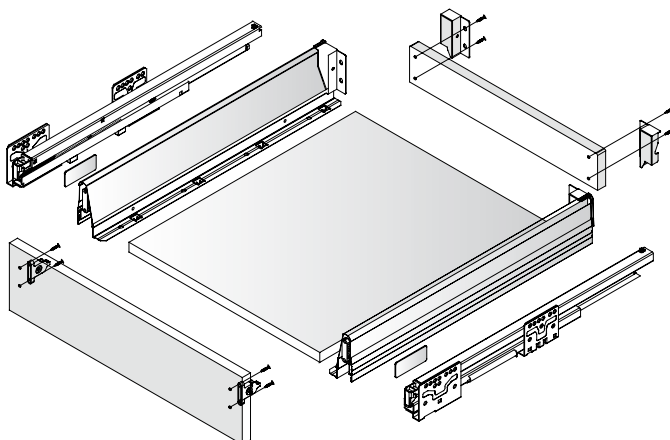


1. Slides left/right

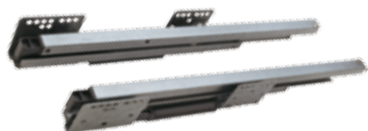

Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer sides left/right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

3. Front fixing brackets left/right

(available upon request with Ø 10 mm dowels with mm 32 distance for fastening)




4A. Back fixing brackets (chipboard back)
left/right







F-1 Railing Version 160 mm High

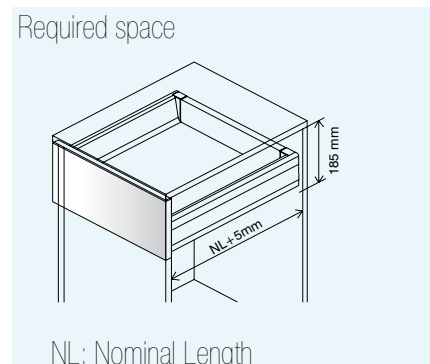


Product Characteristics


- Extremely silent, stable, and smooth mechanism
- Available lengths: mm 270, 300, 350, 400, 450, 500, 550
- 86 mm high side plate made of silver gray steel RAL 9006, upon request white RAL 9010, cream RAL 9001 or black RAL 9005 (see page 16); it can be heightened to 160 mm
- Vertical drawer adjustment ± 2 mm; horizontal drawer adjustment ± 1 mm
- Quick assembling and dismantling
- Concealed full extension runners with 40 kg load capacity
- Tested up to 80,000 cycles
- Built-in self-closing & soft closing mechanisms

Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. drawer height
F1270V4NT>PRV01	270 mm	250 mm	280 mm	185 mm
F1300V4NT>PRV01	300 mm	274 mm	305 mm	185 mm
F1350V4NT>PRV01	350 mm	324 mm	355 mm	185 mm
F1400V4NT>PRV01	400 mm	374 mm	405 mm	185 mm
F1450V4NT>PRV01	450 mm	424 mm	455 mm	185 mm
F1500V4NT>PRV01	500 mm	474 mm	505 mm	185 mm
F1550V4NT>PRV01	550 mm	524 mm	555 mm	185 mm

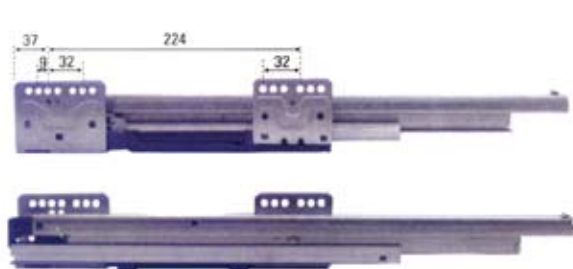




F-1 Railing Version 160 mm High

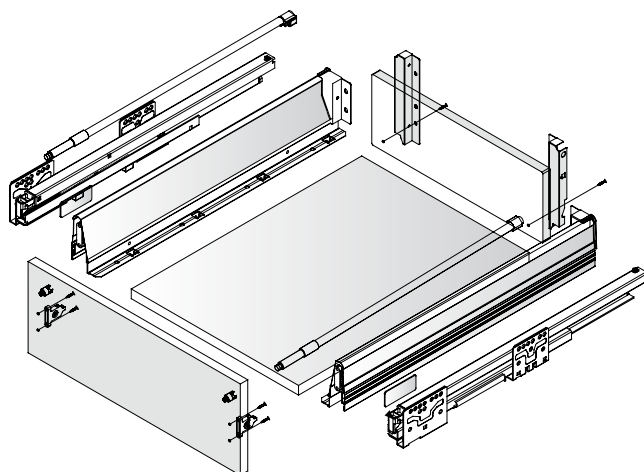


1. Slides left/right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer sides left/right

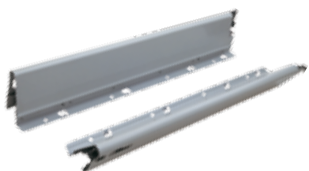

Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

3. Front fixing brackets left/right

(available upon request with Ø 10 mm dowels with mm 32 distance for fastening)



4A. Back fixing brackets (chipboard back) left/right




5. Railing Bars








F-1 Railing Version 200 mm High (D23)

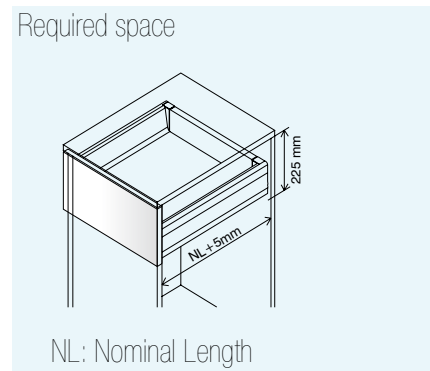


Product Characteristics


- Extremely silent, stable, and smooth mechanism
- Available lengths: mm 270, 300, 350, 400, 450, 500, 550
- 86 mm high side plate made of silver gray steel RAL 9006, upon request white RAL 9010, cream RAL 9001 or black RAL 9005 (see page 16); it can be heightened to 200 mm
- Vertical drawer adjustment ± 2 mm; horizontal drawer adjustment ± 1 mm
- Quick assembling and dismantling
- Concealed full extension runners with 40 kg load capacity
- Tested up to 80,000 cycles
- Built-in self-closing & soft closing mechanisms

Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. drawer height
F1270V5NT>PRV01	270 mm	250 mm	280 mm	225 mm
F1300V5NT>PRV01	300 mm	274 mm	305 mm	225 mm
F1350V5NT>PRV01	350 mm	324 mm	355 mm	225 mm
F1400V5NT>PRV01	400 mm	374 mm	405 mm	225 mm
F1450V5NT>PRV01	450 mm	424 mm	455 mm	225 mm
F1500V5NT>PRV01	500 mm	474 mm	505 mm	225 mm
F1550V5NT>PRV01	550 mm	524 mm	555 mm	225 mm

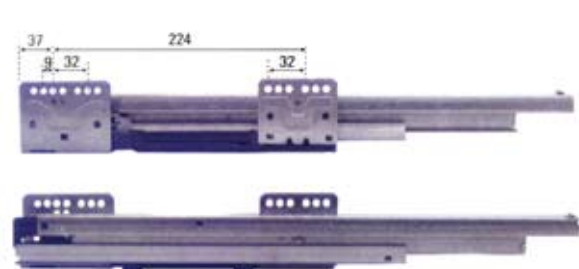




F-1 Railing Version 200 mm High

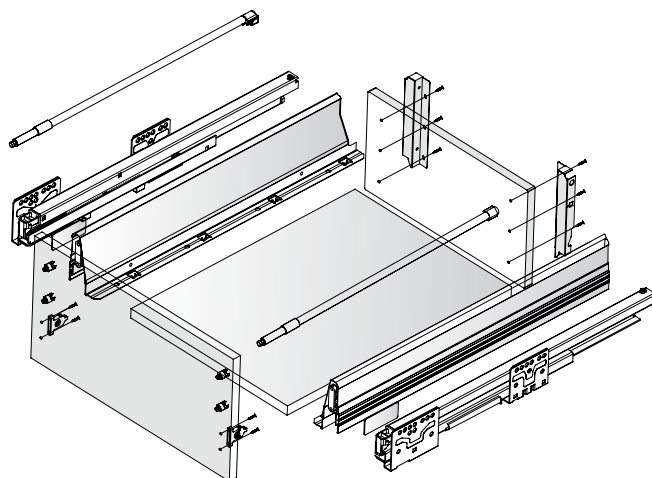

1. Slides left/right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer Sides & Cover Caps Left/Right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

3. Front fixing brackets left/right

(available upon request with Ø 10 mm dowels with mm 32 distance for fastening)



4A. Back fixing brackets (chipboard back) left/right h 200 mm with railing fastening




5. Railing Bars






Mounting instructions F-1 standard and inner drawer 86 mm high (D21)

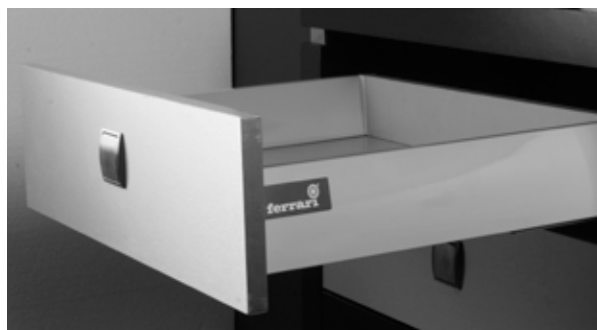

Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. Drawer height
F1270V1NT>PRV01	270 mm	250 mm	280 mm	105 mm
F1300V1NT>PRV01	300 mm	274 mm	305 mm	105 mm
F1350V1NT>PRV01	350 mm	324 mm	355 mm	105 mm
F1400V1NT>PRV01	400 mm	374 mm	405 mm	105 mm
F1450V1NT>PRV01	450 mm	424 mm	455 mm	105 mm
F1500V1NT>PRV01	500 mm	474 mm	505 mm	105 mm
F1550V1NT>PRV01	550 mm	524 mm	555 mm	105 mm

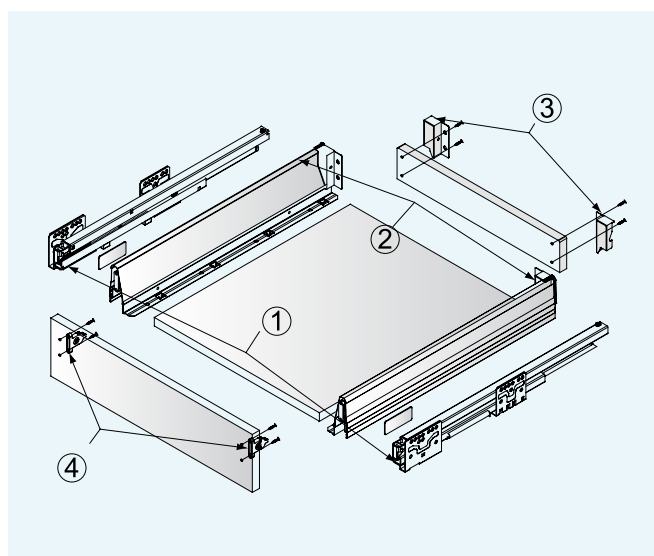

1. Slides left/right

Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer sides left/right


Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm


3. Back fixing brackets (chipboard back) left/right


4. Front fixing brackets left/right

Back and bottom panels dimensions
Pannel width mm 16 left/right

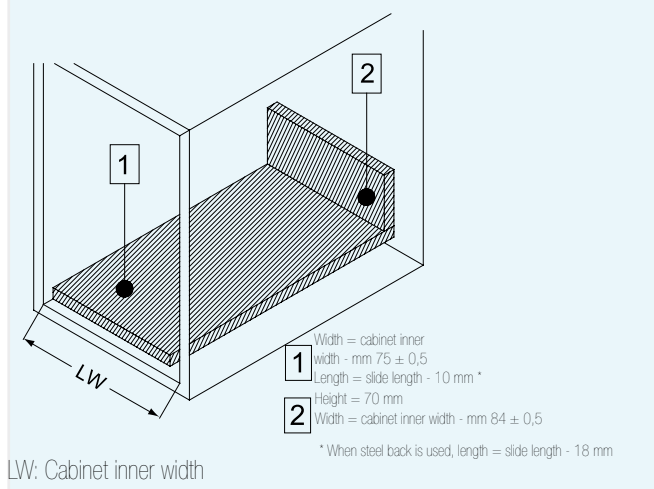


Slides Installation

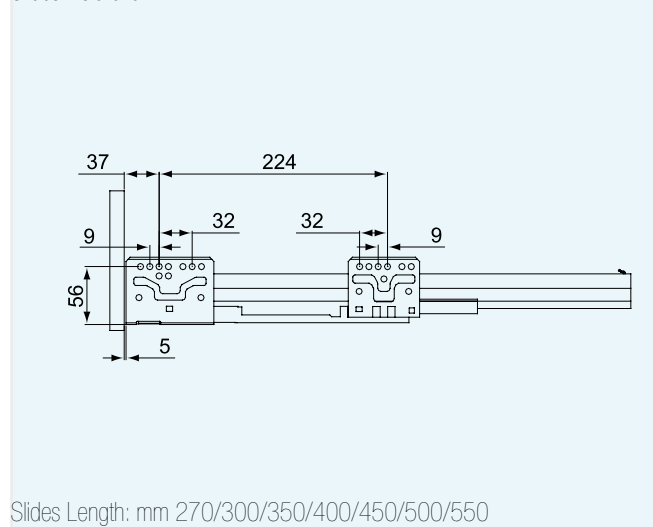




Mounting instructions F-1 86 mm high


Cabinet dimension

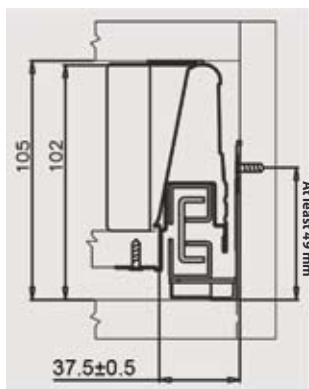


Front panel position

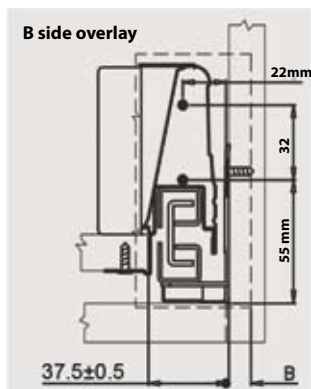



Front fixing brackets position

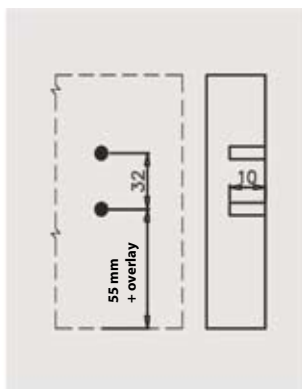

Back fixing brackets position

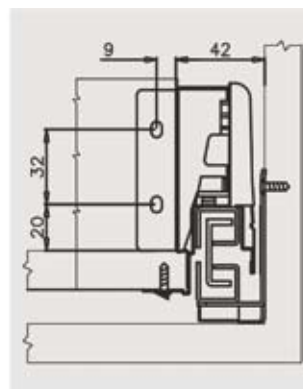


Installation of front fixing brackets





Height adjustment of front panel ± 2 mm







Side adjustment of front panel: right 1 mm





Side adjustment of front panel: left 1 mm




Drawer assembly

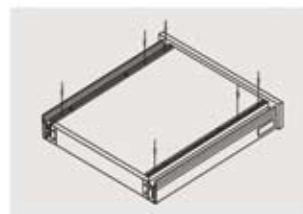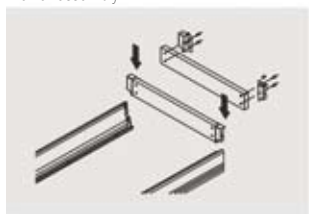

Installation of drawer

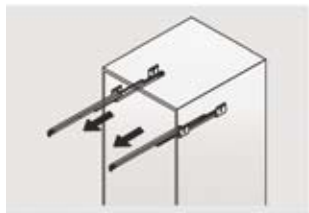

Drawer removal

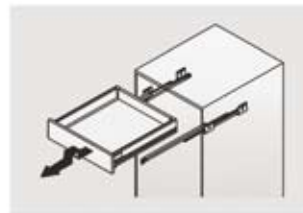

Soft closing






Mounting instructions F-1 railing version 160 mm high (D22)




Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. Drawer height
F1270V4NT>PRV01	270 mm	250 mm	280 mm	185 mm
F1300V4NT>PRV01	300 mm	274 mm	305 mm	185 mm
F1350V4NT>PRV01	350 mm	324 mm	355 mm	185 mm
F1400V4NT>PRV01	400 mm	374 mm	405 mm	185 mm
F1450V4NT>PRV01	450 mm	424 mm	455 mm	185 mm
F1500V4NT>PRV01	500 mm	474 mm	505 mm	185 mm
F1550V4NT>PRV01	550 mm	524 mm	555 mm	185 mm

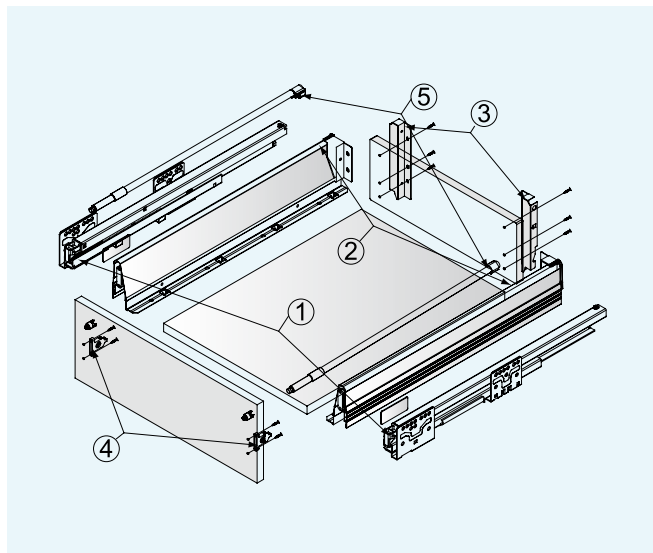

1. Slides left/right


Nominal Length



270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer sides left/right

Nominal Length



270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

3. Back fixing brackets (chipboard back) left/right




4. Front fixing brackets left/right



5. Railing left/right




Back and bottom panels dimensions
Pannel width mm 16 left/right

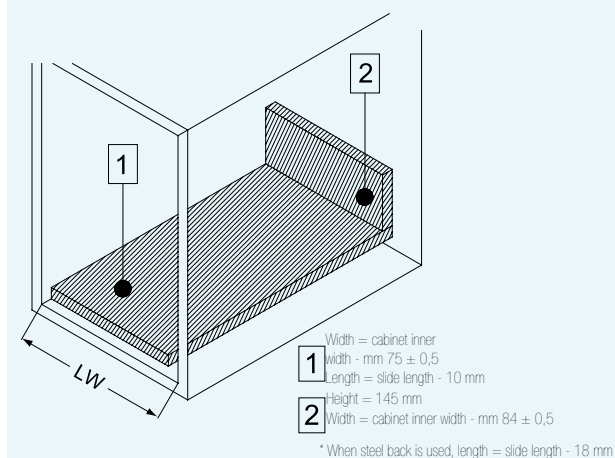


LW: Cabinet inner width

Slides Installation

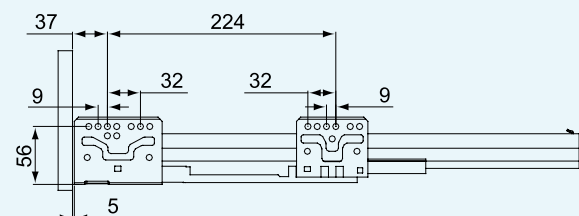


Slides Length: mm 270/300/350/400/450/500/550




Mounting instructions F-1 railing version 160 mm high


Cabinet dimension

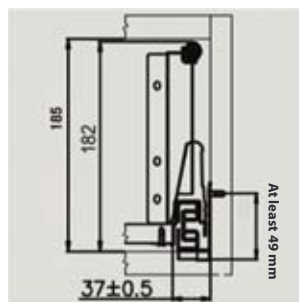


Front panel position

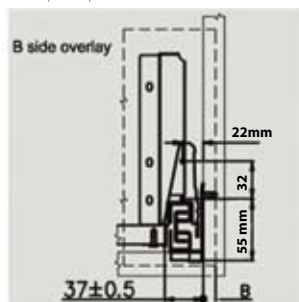


Front fixing brackets position

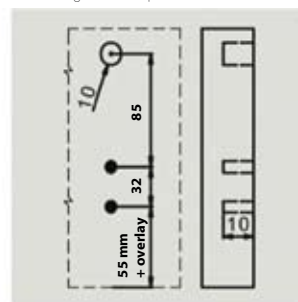


Back fixing brackets position

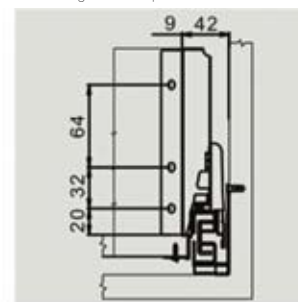


Installation of front fixing brackets

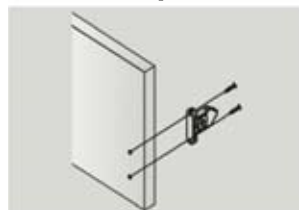



Height adjustment of front panel ± 2 mm

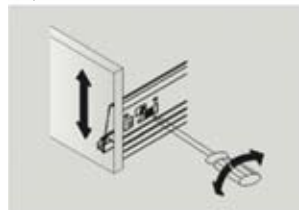



Side adjustment of front panel: right 1 mm

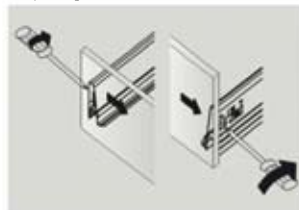



Side adjustment of front panel: left 1 mm

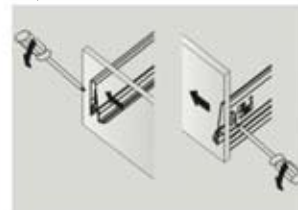


Drawer assembly

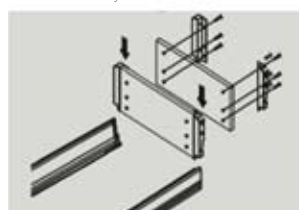

Railing installation

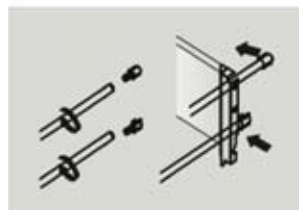

Installation of drawer




Soft closing



Drawer removal







Mounting instructions F-1 standard and inner drawer railing version 200 mm high (D23)



Model	Runners length	Useful drawer length	Min. internal cabinet depth	Min. Drawer height
F1270V5NT>PRV01	270mm	250 mm	280 mm	225 mm
F1300V5NT>PRV01	300 mm	274 mm	305 mm	225 mm
F1350V5NT>PRV01	350 mm	324 mm	355 mm	225 mm
F1400V5NT>PRV01	400 mm	374 mm	405 mm	225 mm
F1450V5NT>PRV01	450 mm	424 mm	455 mm	225 mm
F1500V5NT>PRV01	500 mm	474 mm	505 mm	225 mm
F1550V5NT>PRV01	550 mm	524 mm	555 mm	225 mm

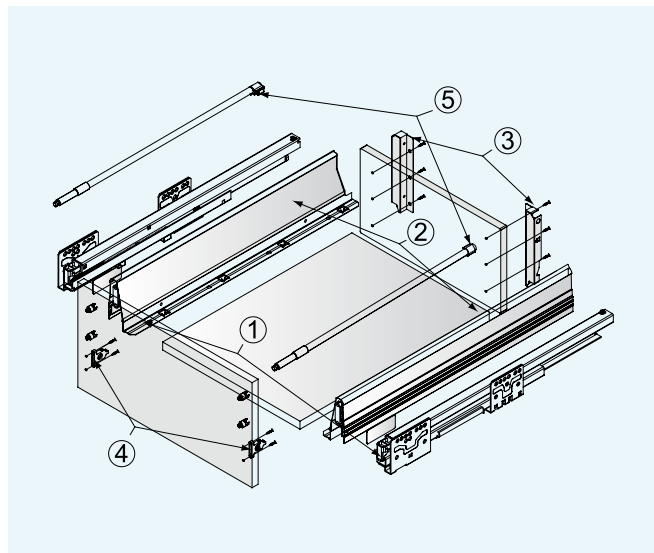


1. Slides left/right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

2. Drawer sides left/right



Nominal Length

270 mm
300 mm
350 mm
400 mm
450 mm
500 mm
550 mm

3. Back fixing brackets (chipboard back) left/right




4. Front fixing brackets left/right




5. Railing left/right




Back and bottom panels dimensions
Pannel width mm 16 left/right

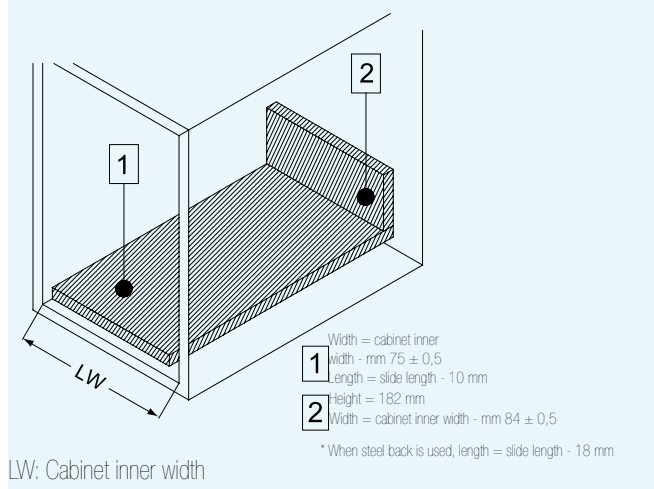

Slides Installation

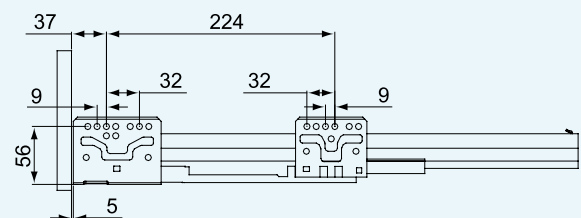


Slides Length: mm 270/300/350/400/450/500/550




Mounting instructions F-1 railing version 200 mm high


Cabinet dimension

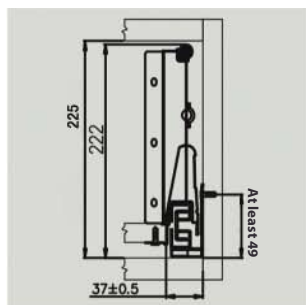


Front panel position

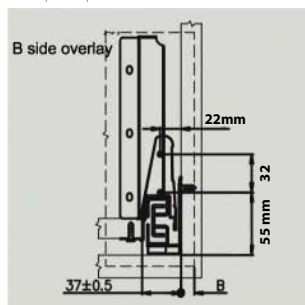


Front fixing brackets position

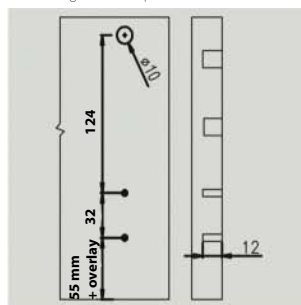



Back fixing brackets position

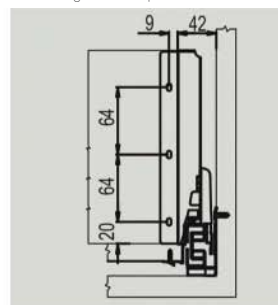


Installation of front fixing brackets

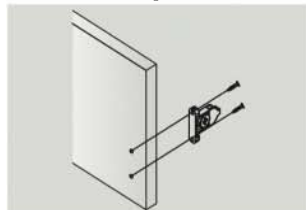


Height adjustment of front panel ± 2 mm

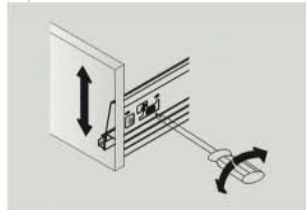




Side adjustment of front panel: right 1 mm

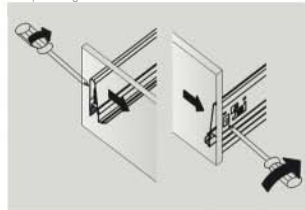





Removal of front panel





Side adjustment of front panel: left 1 mm






Drawer assembly

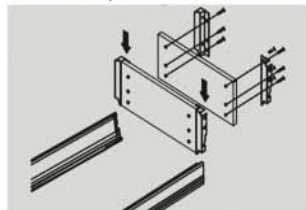


Railing installation





Installation of drawer

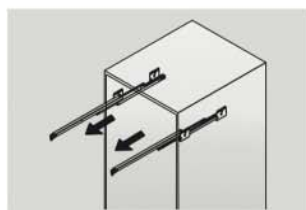

Drawer removal

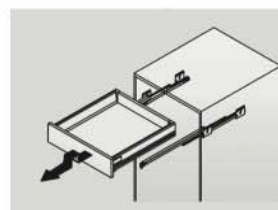


Soft closing

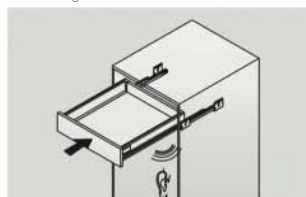



How to order

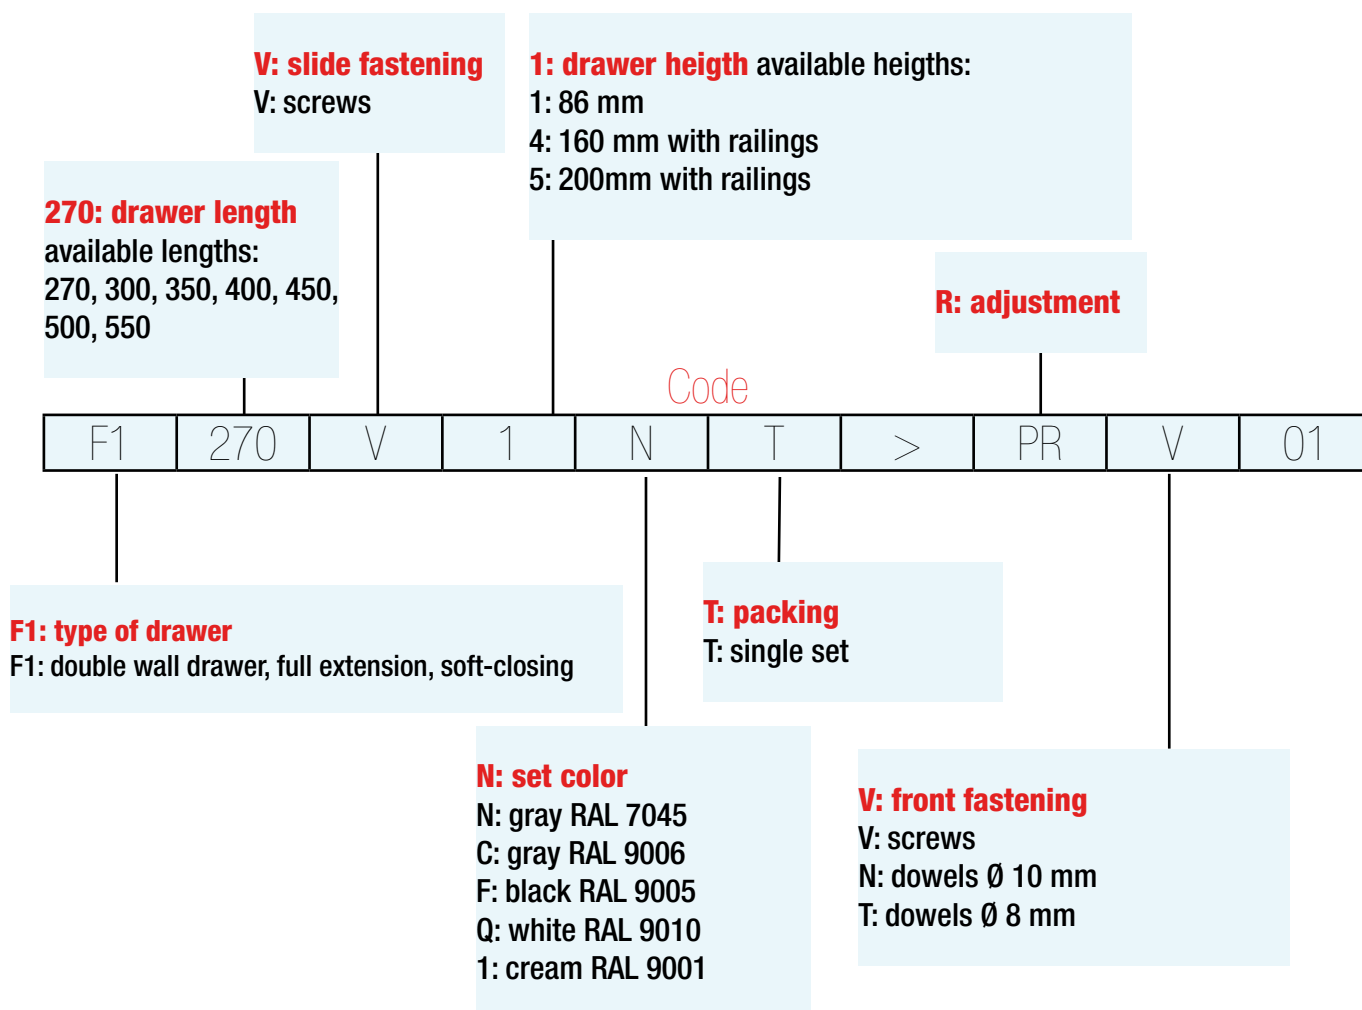

The set of pre-assembled drawers includes:

- 2 slides left/right
- 2 drawer sides left/right with adjustment
- 2 front fixing brackets left/right
- 2 back fixing brackets left/right
- 2 railings left/right (for H 160 mm & H 200mm models only)
- 2 cover caps left right
- 1 bag with 4 screws for front fastening



The cover caps can be anonymous, with the Ferrari logo or with customized name/logo (min. 1,000 set).



Accessories for F-1 inner drawers



Product code	Packing	Description
F1A210086VI>P	100 pcs	front connector for inner drawer left/right with 4 fixing screws F-1 drawers H 86 mm

Product code	Packing	Description
F1A210150VI>P	100 pcs	front connector for the inner drawer left/right with 4 fixing screws for F-1 H200 mm drawers




Plate length	Product Code	Description
mm 600	F1A000600NI>P	Plate for F-1 H 86 mm and H 200 mm inner drawers
mm 800	F1A000800NI>P	
mm 1085	F1A001085NI>P	




Product code	Packing	Description
F1A301200NI>P	200 pcs	horizontal drawer-rod L=1200mm for F-1 H 200 mm drawers



Product code	Packing	Description
F1A410000VI>P	100 pcs	handhold for F-1 drawers H 200 mm



Drawer length	Product Code	Description
mm 400	F1A100400NI>P	double-layer heightened side plate left/right for F-1 drawers H 200 mm
mm 450	F1A100450NI>P	
mm 500	F1A100500NI>P	
mm 550	F1A100500NI>P	




How to get an inner drawer - H86 mm

In order to mount an inner drawer order a F-1 drawer H86 mm (see on page 4) adding the accessories mentioned above.



Front fixing brackets for metal plate left/right

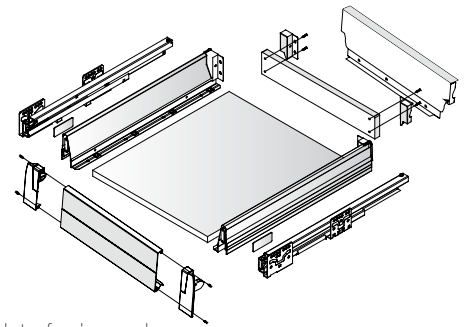

Front plate for inner drawer



The inner drawer front plate width is equal to the cabinet inner width minus mm 86.

How to get an inner drawer - H200 mm


In order to mount an inner drawer with heightened sides and handle, order a F-1 drawer H200 mm drawer (see on page 8) adding the accessories mentioned above.



Front fixing brackets for metal plate left/right



Handle

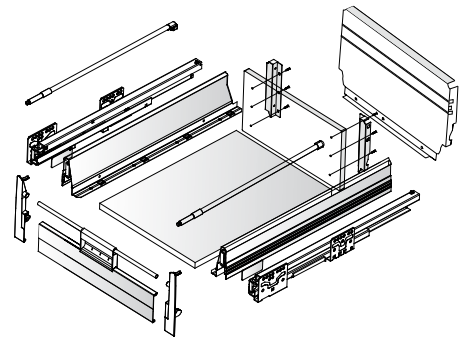

Horizontal Bar



Front plate for inner drawer




The inner drawer horizontal bar width is equal to the cabinet inner width minus mm 90.

600 (l) mm: Suitable for those with body width of 275-700 mm

800 (l) mm: Suitable for those with body width of 800-900 mm

1085 (l) mm: Suitable for those with body of 1000-1200 mm

The inner drawer front plate width is equal to the cabinet inner width minus mm 86.




F-1 Box the double wall drawer




Page 19

Accessories: glass sides and supports

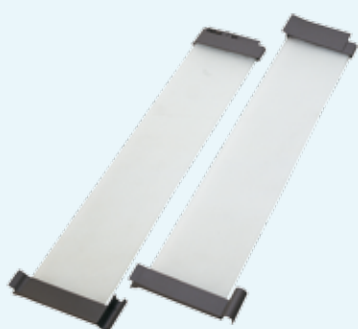

Drawer length	Product Code	Description
mm 300	F1A120300SI>P	left/right heightened side plate made of fogged glass for F-1 H 86 mm (D21) and H 200 mm (D23) drawers. Plastic supports to be ordered separately (see below)
mm 350	F1A120350SI>P	
mm 400	F1A120400SI>P	
mm 450	F1A120450SI>P	
mm 500	F1A120500SI>P	
mm 550	F1A120550SI>P	

Glass sides

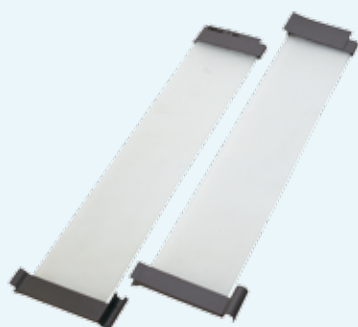

Drawer length	Product Code	Description
mm 300	F1A120300TI>P	left/right heightened side plate made of Transparent glass for F-1 H 86 mm (D21) and H 200 mm (D23) drawers. Plastic supports to be ordered separately (see below)
mm 350	F1A120350TI>P	
mm 400	F1A120400TI>P	
mm 450	F1A120450TI>P	
mm 500	F1A120500TI>P	
mm 550	F1A120550TI>P	



Product code	Description
F1A210000VI>P	plastic support left/right-front/back for glass door side plate



Accessories: inserts and organizers




A wide range of inserts made of stainless steel is available for different needs.
Easy to clean and to install, these inserts can be combined in different ways.
The drawer side is inclined, this must be considered while ordering and installing the inserts.



For 30 cm cabinet width

Drawer length	Product Code
mm 400	F1A901400NI>P
mm 450	F1A901450NI>P
mm 500	F1A901500NI>P
mm 550	F1A901550NI>P

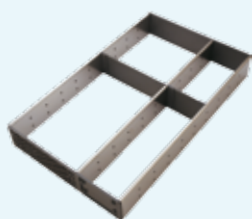


For 45 cm cabinet width

Drawer length	Product Code
mm 400	F1A50A400NI>P
mm 450	F1A50A450NI>P
mm 500	F1A50A500NI>P
mm 550	F1A50A550NI>P



For 30 cm cabinet width

Drawer length	Product Code
mm 400	F1A906400NI>P
mm 450	F1A906450NI>P
mm 500	F1A906500NI>P
mm 550	F1A906550NI>P

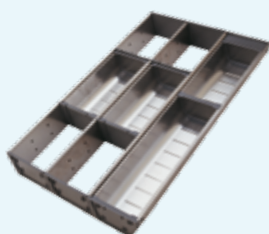


For 45 cm cabinet width

Drawer length	Product Code
mm 400	F1A905400NI>P
mm 450	F1A905450NI>P
mm 500	F1A905500NI>P
mm 550	F1A905550NI>P



For 45 cm cabinet width

Drawer length	Product Code
mm 400	F1A903400NI>P
mm 450	F1A903450NI>P
mm 500	F1A903500NI>P
mm 550	F1A903550NI>P




Insert dimensions	Product Code
mm 88x88	F1A900088NI>P
mm 88x176	F1A900176NI>P
mm 88x264	F1A900264NI>P



For 60 cm cabinet width

Drawer length	Product Code
mm 400	F1A904400NI>P
mm 450	F1A904450NI>P
mm 500	F1A904500NI>P
mm 550	F1A904550NI>P



Separator length	Product Code
	F1A500500NI>P
mm 176	SP0080D21CI2
mm 88	SP0090D21CI2



Separator length	Product Code
mm 88	F1A510088VI>P
mm 176	F1A510176VI>P



ITALY

Ferrari Point srl
Via E. Fermi, 4 - Loc. Olmi
I-31048 S. Biagio di Callalta (TV) - Italy
Tel.: +39 0422 892389
Fax: +39 0422 892296

AMERICA

Ferrari America INC.
4189 Eagle Hill Driver Suite 110
27265 High Point - North Carolina U.S.A.
Tel. +1 336 8411445
Fax. +1 336 8413543
www.ferrariamerica.com
e-mail: info@ferrariamerica.com

UK

Agostino Ferrari (UK) LTD
Unit 1, Humbrol Hedon Road
Hull East Yorks HU9 5NE
Tel. +44 870 1296030
Fax. +44 870 1296040
www.aferrariuk.com
e-mail: info@eurofitsystems.com

GERMANY

Agostino Ferrari Germany GmbH
Höferweg, 22
32602 Vlotho Germany
Tel. +49 5733 877970
Fax. +49 5733 8779710
www.ferrari-fittings.de
e-mail: ferrari@ferrari-fittings.de

CHINA

Ferrari Shunde R.O
New world China Land Shunde 15D
NO.148 Qinghui Road
Daliang Shunde 528308
FoShan China
Tel.: +86 757 22306761-2

SLOVAKIA

A. Ferrari Sk, s.r.o.
Levočská 3013/50
05801 Poprad Slovakia
Tel.: +421 52 7722105
Fax: +421 52 7793900

Each Ferrari's product is constantly improved according to all market technical requirements and proposals. Ferrari hold the right to alter or amend without notice any technical or structural specifications at any time.

Ferrari cannot be held responsible for any usage other than that advise in the catalogue.

If particular application is needed which is not in the recommended tables, we suggest to contact Ferrari Technical Department.

Products sheet are available on demand.



A. Ferrari S.p.A.

23878 Verderio S. (LC) - Italy
Via per Cornate, 45
Tel: +39 039 590 01
Fax: +39 039 590 022 2

www.ferrarisp.it
e-mail: ferrarisp@ferrarisp.it

